



Samsung Galaxy S5 Motherboard Assembly Replacement

Prereq to remove the motherboard from the interior midframe

Written By: Sam Lionheart



INTRODUCTION

Prereq to remove the motherboard from the interior midframe.



TOOLS:


- [Spudger](#) (1)
-

Step 1 — Motherboard Assembly




- Carefully wedge the tip of a spudger underneath the antenna cable connector.
- Delicately lift the spudger directly upwards to disconnect the antenna connector off its socket on the motherboard.

Step 2

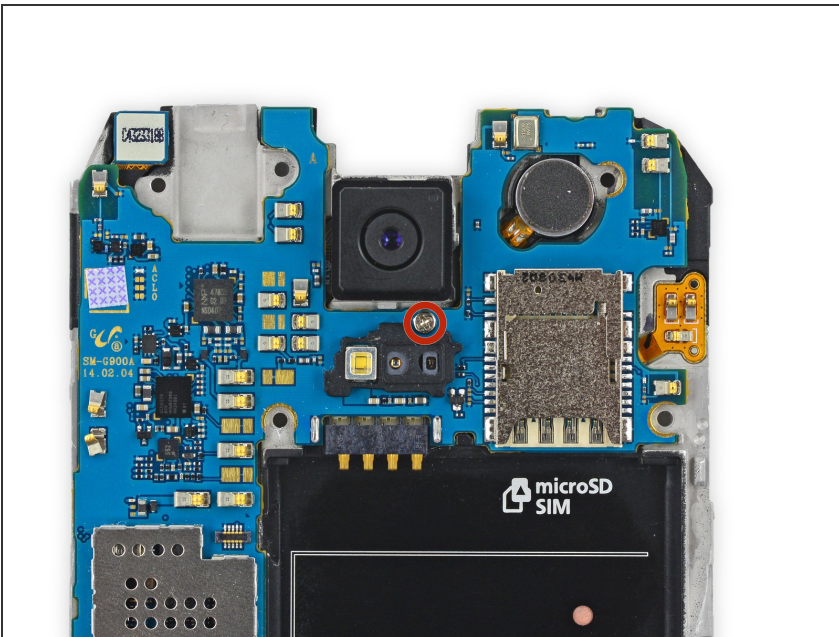

- Remove the single 3.0 mm Phillips #000 screw securing the motherboard to the midframe.

Step 3

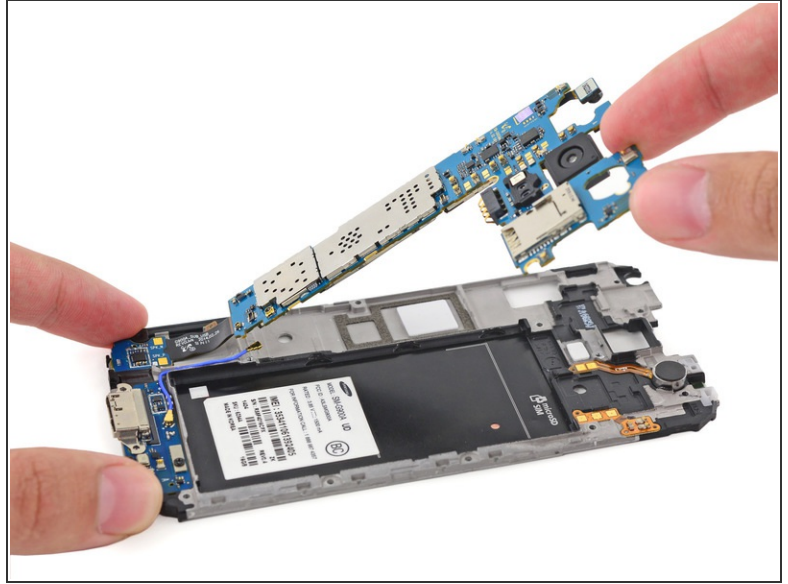

- Pull, but do **not** remove, the camera end of the motherboard up from the midframe to allow access to the connectors on the rear.

⚠ Do **not** attempt to fully remove the motherboard as it is still attached to the interior midframe by the Micro-USB port daughterboard connector.

Step 4



- Use the flat end of a spudger to pry the daughterboard connector straight up off its socket on the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-25 02:36:57 AM.